

CITED BY APPLICANT
Europäisches Patentamt

(19)



European Patent Office

Office européen des brevets



(11)

EP 0 999 649 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

10.05.2000 Bulletin 2000/19

(51) Int Cl.7: H04B 1/10, H04B 17/00

(21) Application number: 99660173.8

(22) Date of filing: 02.11.1999

(84) Designated Contracting States:

AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: 06.11.1998 FI 982409

(71) Applicant: NOKIA MOBILE PHONES LTD.

02150 Espoo (FI)

(72) Inventor: Rauhala, Antti

25130 Muurla (FI)

(74) Representative: Kupiainen, Juhani Kalervo

Berggren Oy Ab

P.O. Box 16

00101 Helsinki (FI)

(54) Method and arrangement for linearizing a radio receiver

(57) The invention pertains to a method and an arrangement for linearizing a radio receiver (20). The invention is advantageously applied in the reception circuits of mobile stations. A receiver according to the invention monitors the signal strength on the receive channel and its neighboring channels. In addition, the receiver can determine the quality of the detected signal by calculating its bit error ratio or signal-to-noise ratio. In normal conditions, i.e. when the signal strength is sat-

isfactory on the receive channel and normal on the neighboring channels, the supply currents of the front-end amplifiers (A1, A2) and at least the first mixer (M1) of the receiver are kept relatively small. If the signal strength on the receive channel goes below a predetermined value or, on a neighboring channel, exceeds a predetermined value, said supply currents are increased. This may happen also if the bit error ratio or signal-to-noise ratio reaches a predetermined limit. The supply currents may be adjusted in one or more steps.

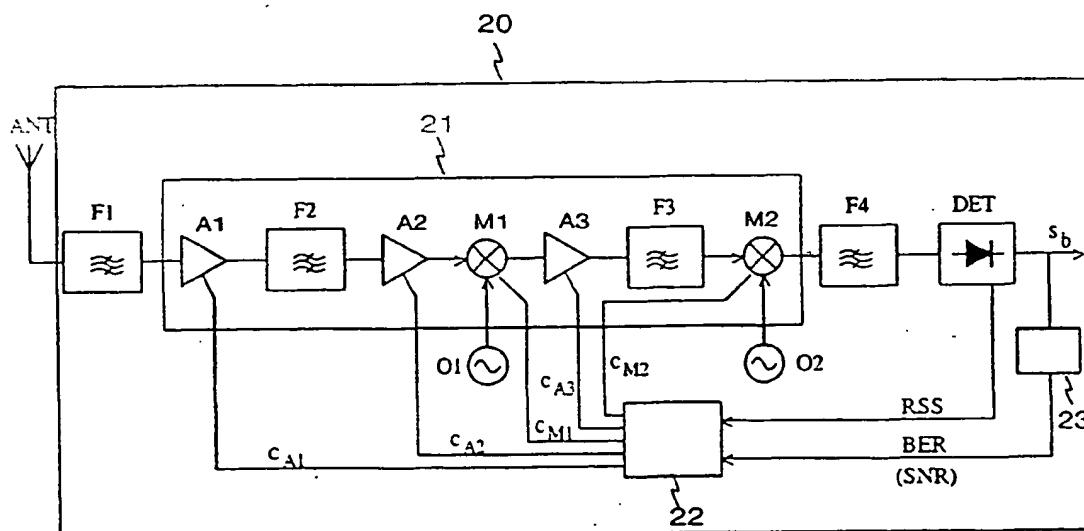


Fig. 2

Description

[0001] The invention relates to a method and an arrangement for linearizing a radio receiver. The invention can be advantageously applied in the reception circuits of mobile stations.

5 [0002] The quality of a signal in a radio receiver is degraded by noise and interference added to the signal on the transmission path, noise in the reception circuitry, as well as by noise and interference indirectly caused by other radio signals. The latter refers to a situation in which a signal on a neighboring channel, which momentarily is considerably stronger than the signal to be received, shifts the operating point of the high-frequency amplifier and/or mixer towards non-linearity and saturation. This degrades the signal-to-noise ratio at the amplifier output. In the mixer the increase
10 of non-linearity will intensify intermodulation products and, thus, increase the overall noise and interference level.

[0003] A basic method for reducing noise and interference is filtering, which takes place in all receivers in many stages of operation and which will not be discussed further in this description. Rather, we will discuss the widening of the linear range of amplifiers and mixers as a means of reducing noise and interference. The linear range gets wider as the operating voltage is increased or, if the operating voltage remains unchanged, as the supply current is increased.
15 So, the signal quality can be improved by using more energy in the receiver. In the prior art, said circuits are specified such that the signal quality requirements will be met even in poor noise and interference conditions. A disadvantage of this method, as regards portable devices, is that it requires a relatively large supply of energy and, therefore, shortens the battery life.

[0004] From the prior art it is also known a method in which the strength of the received signal is monitored and the supply current of the mixer is increased if the strength of the signal drops. An advantage of the method is that it improves the quality of the signal and reduces intermodulation products if the field received is weak. A disadvantage, however, is that the supply current will be increased even if the receiver received no other, interfering, signals. Moreover, the amplifiers have to be rated for the worst case, which results in a relatively large continuous current consumption in the amplifiers.

25 [0005] The object of the invention is to reduce the aforementioned disadvantages related to the prior art.

[0006] The basic idea of the invention is as follows: A receiver monitors the signal strength on the receive channel and neighboring channels. In addition, the receiver can determine the quality of the detected signal by calculating its bit error ratio or signal-to-noise ratio. In normal conditions, i.e. when the signal strength is satisfactory on the receive channel and ordinary on the neighboring channels, the supply currents of the receiver's front-end amplifiers and at least the first mixer are kept relatively low. If the signal strength goes below a certain value on the receive channel or exceeds a certain value on a neighboring channel, said supply currents are increased. This may happen also if the bit error ratio or signal-to-noise ratio deteriorates down to a certain limit. Adjustment of the supply currents may take place in one or more steps.
30

[0007] The advantage of the invention is that the energy consumption of the receiver can be reduced without degrading the signal quality. This means longer life for the battery or, if the life of the battery is kept unchanged, that a smaller battery can be used. If the mean energy consumption is kept the same as in receivers of the prior art, the advantage is a better signal quality.

[0008] The method according to the invention for linearizing a radio receiver in a signal chain in which

- 40 - a signal received from an antenna is amplified and the amplified signal is detected, and
- the received signal is processed by at least one linear unit

is characterized in that

- 45 - at least one quality factor of the detected signal is measured, and
- the supply current of said at least one linear unit is controlled on the basis of the measurement results.

[0009] The arrangement according to the invention for linearizing a radio receiver comprising means for detecting a received signal and at least one linear unit with current supply circuits for processing the received signal is characterized in that it comprises
50

- means for measuring at least one quality factor of the detected signal, and
- means for controlling the linear unit's supply current on the basis of the measurement results.

55 [0010] Preferred embodiments of the invention are disclosed in the dependent claims.

[0011] The invention will now be described in detail. Reference will be made to the accompanying drawings wherein

Fig. 1 is a block diagram of a typical radio receiver according to the prior art,

Fig. 2 shows the structure of Fig. 1 supplemented with a functional block according to the invention,
 Fig. 3 shows an example of supply current control according to the invention,
 Fig. 4 shows a second example of supply current control according to the invention,
 Fig. 5 shows a third example of supply current control according to the invention,
 Fig. 6 shows an example of amplifier supply current control according to the invention, and
 Fig. 7 shows an example of mixer supply current control according to the invention.

[0012] Fig. 1 is a simplified example of a radio receiver without the low-frequency components. An antenna ANT is coupled to a duplex filter F1, which is needed e.g. in mobile phones. Filter F1 is coupled to a low-noise pre-amplifier A1. Amplifier A1 is coupled to a channel selector filter F2 in the tuner, and filter F2 is coupled to an amplifier A2. The output of amplifier A2 is coupled to the first input of a first mixer M1. The second input of mixer M1 is connected with a local oscillator O1. The output of mixer M1 is coupled to an amplifier A3, and the output of the latter is coupled to a first intermediate frequency (IF) filter F3. The output of filter F3 is coupled to the first input of a second mixer M2. The second input of mixer M2 is connected with a second local oscillator O2. The output of mixer M2 is coupled to a second IF filter F4 and the output of the latter to a detector DET. Detector DET provides a baseband signal s_b . The amplifiers and mixers in the receiver are in this description and particularly in the claims called "linear units". In the ideal case they operate in a totally linear manner in all situations. In practice, non-linearity is present in their operation which causes signal degradation. The higher the signal levels to be processed, the more there is non-linearity in the operation of the linear units.

[0013] Fig. 2 shows a similar signal path structure as Fig. 1. Unit 21 includes the linear units, or amplifiers A1, A2 and A3 as well as mixers M1 and M2. What is additional to Fig. 1 is a control unit 22 according to the invention for controlling the supply currents of the linear units. Detector DET provides information about the signal strength (RSS) on the channel to which the receiver is tuned. In the example of Fig. 2 the transmitted signal is digital. Unit 23 calculates the bit error ratio (BER) that describes the quality of the received and detected signal s_b . The operation of unit 23 may be realized in the form of a computer program. Signals RSS and BER are taken to the control unit 22 the outputs of which are coupled to the linear units. Control signal c_{A1} sets the supply current of amplifier A1. Similarly, signal c_{A2} sets the supply current of amplifier A2, signal c_{M1} that of mixer M1, signal c_{A3} that of amplifier A3, and signal c_{M2} that of mixer M2.

[0014] Alternatively, the quality of the detected signal can be determined by calculating its signal-to-noise ratio. In that case, unit 23 provides signal SNR (signal-to-noise ratio).

[0015] Fig. 3 relates to a simple example of supply current control for the linear units. A control unit 32 only receives the receive signal strength RSS information which has threshold values S31 and S32. The control unit 32 produces one one-bit control signal c, which is taken to all linear units A1, A2, M1, A3 and M2. The supply current of a given linear unit has two values. Supply currents are controlled with signal c according to the table below.

RSS	c	I_i
$\leq S31$	0	I_{ih}
$> S31, < S32$	1	I_{il}
$\geq S32$	0	I_{ih}

[0016] Subindex i refers to a linear unit. I_{il} stands for the lower supply current value of the linear unit and I_{ih} for the higher supply current value. When the signal strength RSS is not more than S31, signal c is 0 and the linear unit supply currents are at their higher values. The relatively large supply currents help reduce the effects of possible interference from outside the receive channel. When the signal strength RSS is between S31 and S32, signal c is 1 and the supply currents are at their lower values. The relatively small supply currents help reduce energy consumption. When the signal strength is at least S32, signal c is 0 and the supply currents are again at their higher values. Increasing the supply currents this way prevents the operating points of the linear units from shifting into the non-linear region when there is an exceptionally strong signal on the receive channel.

[0017] Fig. 4 relates to a second example of supply current control for the linear units. A control unit 42 receives from detector DET an indication about either the receive channel signal strength RSS or the strength of any signal on the reception band. Signal a from the receiver's tuner control indicates the channel. Signal RSS has one threshold value S4 which corresponds to a relatively low receive signal strength. Signal RSS_n also has one threshold value S_n , which corresponds to a relatively high signal strength on the channel. The control unit 42 provides two one-bit control signals c_A and c_M . Signal c_A is 0 when signal RSS is greater than S4 and signal RSS_n is at the same time smaller than S_n . Otherwise, signal c_A is 1. Signal c_A is taken to amplifiers A1 and A2. Signal c_M is 1 when signal RSS is not greater than S4 and signal RSS_n is at the same time at least S_n . Otherwise, signal c_M is 0. Signal c_M is taken to mixer M1.

amplifier A3 and mixer M2. If signal c_A or signal c_M is 0, the supply current in the linear unit in question is lower, and, conversely, if signal c_A or c_M is 1, the supply current is higher. Thus, the linear unit supply currents are controlled according to the table below. RSS_n stands for the signal strength of the neighboring channel in which the signal strength is greater. Subindex A refers to linear units A1 and A2, and subindex M to linear units M1, A3 and M2. Subindex 1 refers to the lower supply current of the linear unit, and subindex h to the higher supply current. For example, I_{M1} means that the control current in mixers M1 and M2 and in amplifier A3 is set to the lower value.

RSS_n	RSS	I_A	I_M
$<S_n$	$>S_4$	I_{A1}	I_{M1}
$<S_n$	$\leq S_4$	I_{Ah}	I_{M1}
$\geq S_n$	$>S_4$	I_{Ah}	I_{M1}
$\geq S_n$	$\leq S_4$	I_{Ah}	I_{Mh}

[0018] When the signal strength on the receive channel is normal or relatively high, and on the neighboring channels normal or relatively low, all linear unit supply currents are set to the lower values. When the signal strength on the receive channel drops relatively low, the supply currents of the front-end amplifiers A1 and A2 are increased. When the signal strength on the receive channel is at least normal, but relatively high on a neighboring channel, the supply currents of amplifiers A1 and A2 are set to the higher values and the supply currents of the other linear units to the lower values. When the signal strength on the receive channel is relatively low and on a neighboring channel relatively high, the supply currents of all linear units are set to the higher values.

[0019] Fig. 5 relates to a third example of supply current control for the linear units. A control unit 52 receives a receive channel signal strength indication RSS and receive channel bit error ratio indication BER. Signal RSS has two threshold values S51 and S52. Signal BER also has two threshold values E1 and E2. The control unit provides three supply current control signals c_{A1} , c_{AM1} and c_{AM2} . Signal c_{A1} has two bits and is taken to amplifier A1. So, the supply current of amplifier A1 may take four values. Signal c_{AM1} also has two bits and is taken to amplifier A2 and mixer M1. So, the supply currents of these units may take four values each. Signal c_{AM2} has one bit and is taken to amplifier A3 and mixer M2. So, the supply currents of these units may take two values each. The logic operation of the control unit 52 is arranged such that the supply current control for the linear units is in accordance with the table below, for example. For simplicity, supply current values are denoted by just numbers on the right-hand side of the table. Number 1 means the lowest supply current values, number two the second lowest values, number 3 the third lowest values and number 4 the highest supply current values.

RSS	BER	I_{A1}	I_{A2} and I_{M1}	I_{A3} and I_{M2}
$>S_{51}$	$<E_1$	1	1	1
$>S_{51}$	$>E_1, <E_2$	3	2	1
$>S_{51}$	$>E_2$	4	4	2
$<S_{51}, >S_{52}$	$<E_1$	2	1	1
$<S_{51}, >S_{52}$	$>E_1, <E_2$	3	2	1
$<S_{51}, >S_{52}$	$>E_2$	4	4	2
$<S_{52}$	$<E_1$	2	2	1
$<S_{52}$	$>E_1, <E_2$	3	3	2
$<S_{52}$	$>E_2$	4	4	2

[0020] When the signal strength RSS on the receive channel is normal, i.e. greater than S51, and the bit error ratio BER relatively low, the supply currents of all linear units are kept relatively small. When the bit error ratio is relatively high, i.e. greater than threshold value E2, the supply currents of all linear units are set to the maximum values regardless of the signal strength value. If the bit error ratio is high even though the signal strength on the receive channel is normal, the probable cause is an exceptionally strong signal on a neighboring channel, so that there is a special reason to improve the linearity of the linear units. The rest of the nine cases shown on the table fall between these cases. For example, row 5 of the table depicts a case in which the signal strength is somewhat smaller than normal and the bit error ratio is somewhat greater than normal. The supply current of the first amplifier A1 is thereby set to the second

highest value, the supply currents of amplifier A2 and mixer M1 are set to the second smallest values, and the supply currents of amplifier A3 and mixer M2 are set to the smallest values. Naturally, suitable lag is arranged in the operation of the control unit 52 lest oscillatory phenomena occur in the control process.

[0021] Fig. 6 shows an example of a linear unit's supply current control. In this example the linear unit 61 is an amplifier realized by a differential pair. The supply current control circuit 62 comprises transistors Q1 and Q2, resistors R1, R2 and R3, as well as switches k_a and k_b . Switch k_a is in series with resistor R2 and switch k_b is in series with resistor R3. Both series connections are coupled in parallel with resistor R1. One end of the whole parallel connection, which thus has three branches, is coupled to the higher power supply voltage V_{CC} terminal of the voltage supply and the other end to the collector of transistor Q1. The collector and base of transistor Q1 are coupled together and the emitter is coupled to the lower power supply voltage V_{EE} terminal of the voltage supply. The collector of transistor Q2 is coupled to amplifier 61 so that the total current I of the transistors in the amplifier is brought to the collector. The base of transistor Q2 is coupled to the base of transistor Q1 and the emitter of transistor Q2 is coupled to the emitter of transistor Q1. Thus, transistor Q2 has the same control voltage V_B as transistor Q1. If the transistors were identical, their collector currents would be equal as well. From the point of view of conservation of energy, transistor Q1 is advantageously manufactured such that its collector current I_1 is considerably smaller than the collector current I of transistor Q2. So, the transistor pair Q1, Q2 serves as a current amplifier, the current gain I/I_1 being 10, for example. In the aforementioned three-branch parallel connection the current of resistor R1 is I_1 , the current of resistor R2 is I_2 and the current of resistor R3 is I_3 . Thus the current I_1 of transistor Q1 is the sum $I_1 + I_2 + I_3$. Current I_2 is zero if switch k_a is open, and current I_3 is zero if switch k_b is open. Switches k_a and k_b are controlled with a two-bit digital signal $c=AB$. When bit A is 0, switch k_a is open, and when bit A is 1, switch k_a is closed. Correspondingly, bit B determines the status of switch k_b . The control for the total current I_1 is thus in accordance with the table below. The supply current I of amplifier 61 follows current I_1 according to the description above.

B	A	I_1	I/I_1
0	0	I_1	1
0	1	$I_1 + I_2$	2 if $R1=R2$
1	0	$I_1 + I_3$	3 if $R1=2 \cdot R3$
1	1	$I_1 + I_2 + I_3$	4 if $R1=R2=2 \cdot R3$

[0022] In Fig. 6, the supply current control circuit 62 is realized with bipolar transistors. A corresponding structure may naturally be realized using MOS (Metal Oxide Semiconductor) transistors, for example. The circuit realized with transistors Q1 and Q2 as well as other circuits operating on the same principle are called "current mirrors" in the claims.

[0023] Fig. 7 shows another example of controlling a linear unit's supply current. In this case, the linear unit 71 is an analog multiplier used as a mixer. It receives a RF or IF signal and a subcarrier from a local oscillator. The mixer produces a signal the spectrum of which includes the spectrum of the input signal shifted both upwards and down. The control circuit 72 for the supply current I of the analog multiplier 71 comprises transistors Q1 and Q2, resistors R1 and R2 as well as switch k. The collector of transistor Q1 is coupled to the first branch of the analog multiplier 71, and the collector of transistor Q2 is coupled to the second branch of the analog multiplier. The emitter of transistor Q1 and the emitter of transistor Q2 are both coupled to the negative voltage V_{EE} terminal of the voltage supply, the first via a resistor the resistance of which is relatively low, and the latter via resistor R4. The bases of transistors Q1 and Q2 are coupled to one another. When the resistances of resistors R3 and R4 are identical and transistors Q1 and Q2 are identical, the collector currents of the transistors are also identical, i.e. half of the analog multiplier's supply current I. Resistor R2 and switch k are coupled in series, and this series connection is coupled in parallel with resistor R1. One end of the parallel connection is coupled to signal ground and the other end to the bases of transistors Q1 and Q2. Switch k is controlled with a one-bit digital signal c. When signal c is 0, switch k is open and the control current I_B of transistors Q1 and Q2 is $V_B/R1$, where V_B is the transistors' base voltage. When signal c is 1, switch k is closed and the control current I_B is $V_B/R1 + V_B/R2$. Thus, the control current I_B increases, causing the supply current I to increase as well. Desired values for the supply current I can be achieved by choosing suitable resistances for resistors R1, R2, R3 and R4. Naturally, a current mirror structure could also be used for controlling the mixer supply current.

[0024] Above it was described techniques according to the invention for controlling the supply currents of linear units in a radio receiver. The invention is not limited to the cases described. The number of linear units to be controlled may vary. Direct sampling does not have any mixers as such. In that case the supply current of analog-to-digital converter can be controlled.

[0025] In that case, the supply current of the detector can be controlled. The number of values set for a particular supply current may vary. The manner in which the degradation of the received signal is taken into account in the control

of supply currents may vary **greatly**. The inventional idea can be applied in numerous ways within the scope defined by the independent claims.

5 Claims

1. A method for linearizing a radio receiver in a signal chain wherein
 - a signal received from an antenna is amplified and the amplified signal is detected, and
 - the received signal is processed by at least one linear unit,
 characterized in that
 - at least one quality factor of the detected signal is measured, and
 - the supply current of said at least one linear unit is controlled on the basis of the measurement results.
2. The method of claim 1, characterized in that the receive channel signal strength is measured as a quality factor of the detected signal.
3. The method of claim 1, characterized in that the signal strength of at least one other channel than the receive channel is measured as a quality factor of the detected signal.
4. The method of claim 1, characterized in that said measurement of at least one quality factor of the detected signal includes a step in which a bit error ratio (BER) is calculated for the signal.
5. The method of claim 1, characterized in that said measurement of at least one quality factor of the detected signal includes a step in which a signal-to-noise ratio is calculated for the signal.
6. The method of claim 2, characterized in that the supply current of at least one linear unit is increased if the signal strength on the receive channel goes below a predetermined threshold value.
7. The method of claim 3, characterized in that the supply current of at least one linear unit is increased if the signal strength on said other channel exceeds a predetermined threshold value.
8. The method of claim 6 or 7, characterized in that at least two threshold values are specified for the signal strength of at least one channel.
9. The method of claim 4, characterized in that the supply current of at least one linear unit is increased if the bit error ratio on the receive channel exceeds a predetermined threshold value.
10. The method of claim 9, characterized in that at least two threshold values are specified for the receive channel bit error ratio.
11. The method of claim 5, characterized in that the supply current of at least one linear unit is increased if the signal-to-noise ratio on the receive channel goes below a predetermined threshold value.
12. The method of claim 11, characterized in that at least two threshold values are specified for the receive channel signal-to-noise ratio.
13. The method of any one of claims 6 to 12, characterized in that at least three settings are specified for the supply current of at least one linear unit.
14. The method of claim 1, characterized in that the supply current of a linear unit is controlled steplessly.
15. An arrangement for linearizing a radio receiver (20) which comprises means for detecting a received signal and at least one linear unit (A1, A2, M1, A3, M2) with current supply circuits for processing the received signal, characterized in that it comprises

- means for measuring at least one quality factor of the detected signal, and
- means (22, 62, 72) for controlling the linear unit's supply current on the basis of the measurement results.

- 5 16. The arrangement of claim 15, **characterized** in that the means for measuring a quality factor of the detected signal comprises means for measuring the signal strength on any channel.
17. The arrangement of claim 15, **characterized** in that the means for measuring at least one quality factor of the detected signal comprises means for calculating a bit error ratio.
- 10 18. The arrangement of claim 15, **characterized** in that the means for measuring at least one quality factor of the detected signal comprises means for calculating a signal-to-noise ratio.
19. The arrangement of claim 15, **characterized** in that the means (22) for controlling the linear units' supply currents comprises a separate logic unit.
- 15 20. The arrangement of claim 15, **characterized** in that the means (22) for controlling the linear units' supply currents comprises a program running in the processor of the receiver.
- 20 21. The arrangement of claim 15, **characterized** in that the means for controlling the linear units' supply currents comprises a analogically controllable current source.
22. The arrangement of claim 15, **characterized** in that the means for controlling the linear units' supply currents comprises a digitally controllable current source.
- 25 23. The arrangement of claim 21 or 22, **characterized** in that said current source (62) comprises a current mirror.
24. The arrangement of claim 15, **characterized** in that the means (22) for controlling the linear units' supply currents comprises an analog amplifier unit.

30

35

40

45

50

55

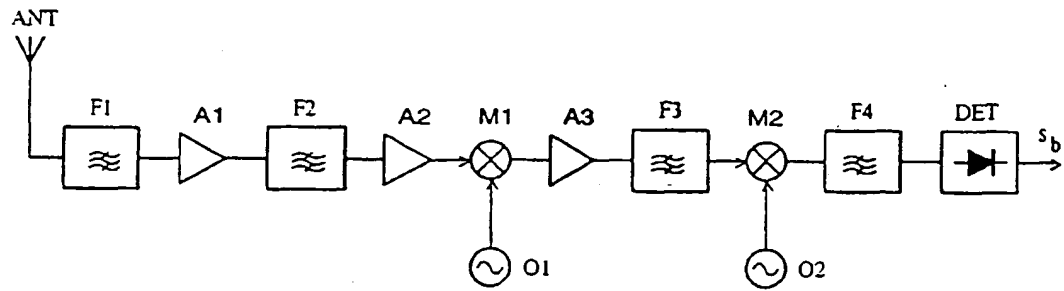


Fig. 1

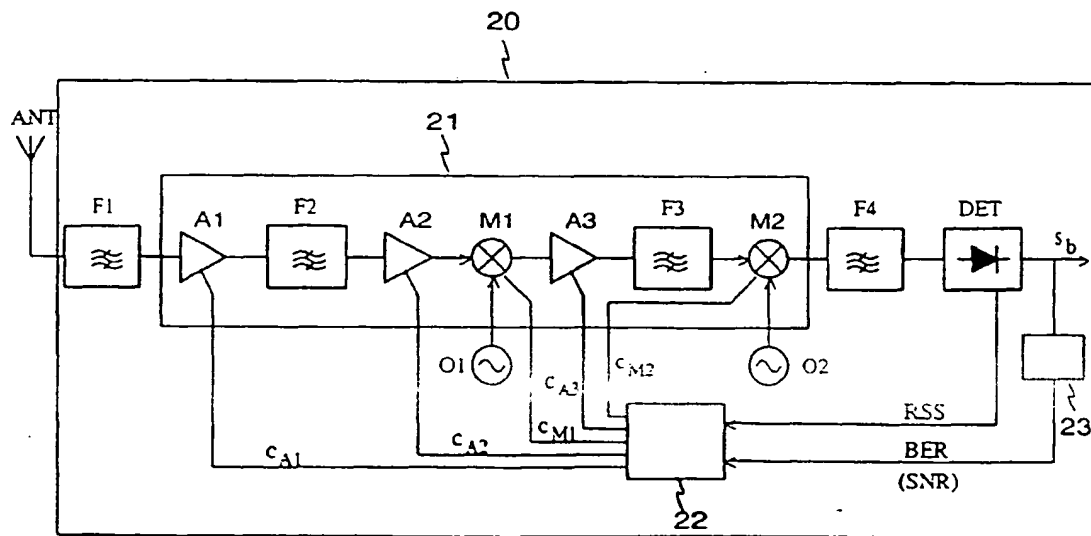


Fig. 2

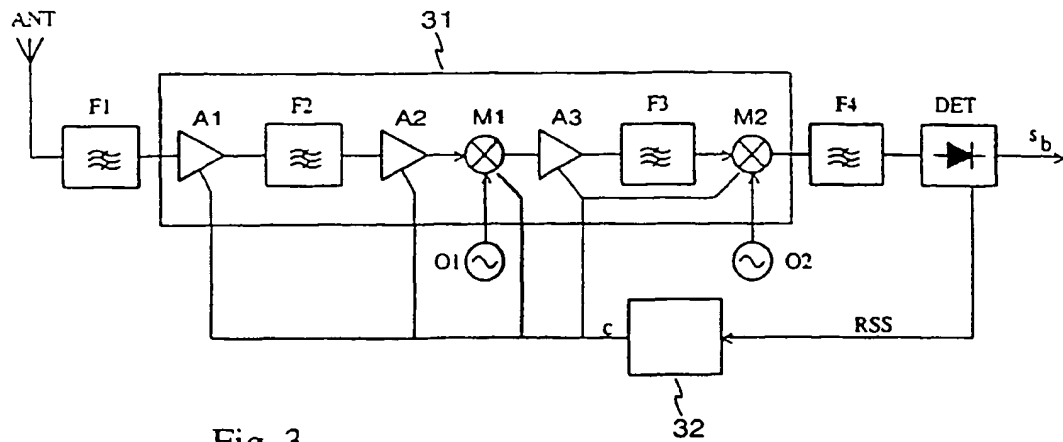


Fig. 3

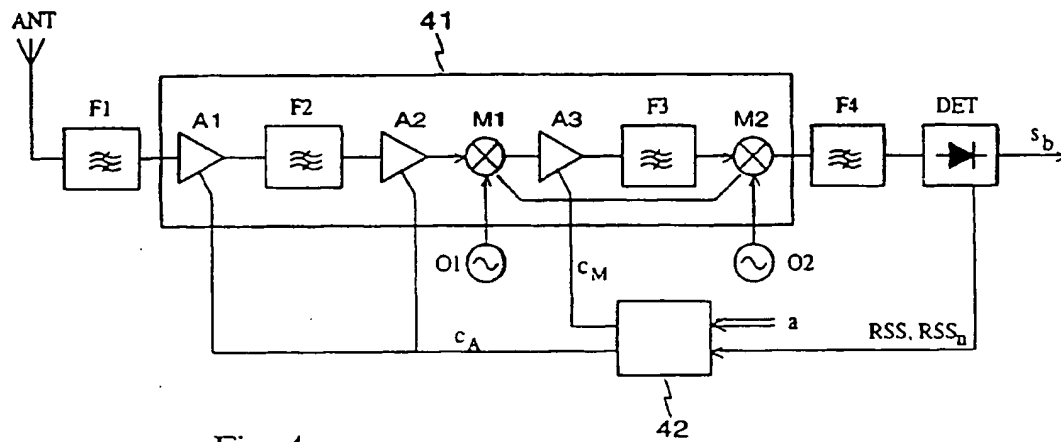


Fig. 4

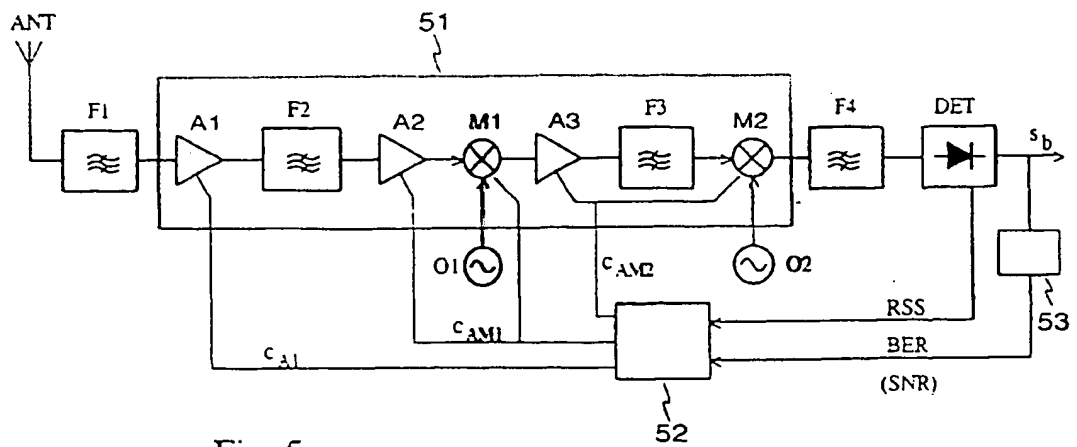


Fig. 5

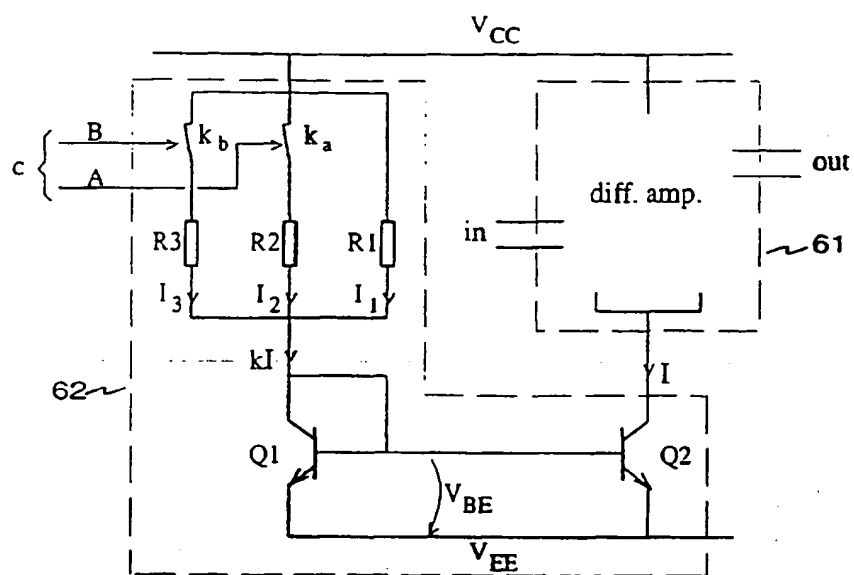


Fig. 6


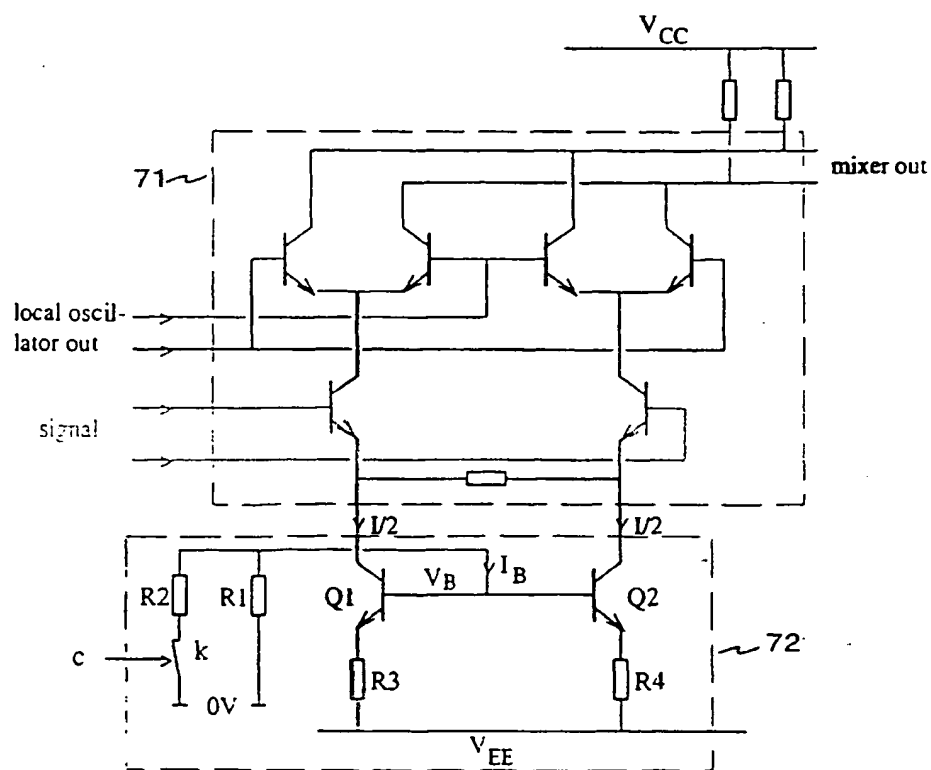


Fig. 7



(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
14.05.2003 Bulletin 2003/20

(51) Int Cl.7: H04B 1/10, H04B 17/00

(43) Date of publication A2:
10.05.2000 Bulletin 2000/19

(21) Application number: 99660173.8

(22) Date of filing: 02.11.1999

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventor: Rauhala, Antti
25130 Muurla (FI)

(74) Representative: Kupiainen, Juhani Kalervo
Berggren Oy Ab
P.O. Box 16
00101 Helsinki (FI)

(30) Priority: 06.11.1998 FI 982409

(71) Applicant: Nokia Corporation
02150 Espoo (FI)

(54) Method and arrangement for linearizing a radio receiver

(57) The invention pertains to a method and an arrangement for linearizing a radio receiver (20). The invention is advantageously applied in the reception circuits of mobile stations. A receiver according to the invention monitors the signal strength on the receive channel and its neighboring channels. In addition, the receiver can determine the quality of the detected signal by calculating its bit error ratio or signal-to-noise ratio. In normal conditions, i.e. when the signal strength is sat-

isfactory on the receive channel and normal on the neighboring channels, the supply currents of the front-end amplifiers (A1, A2) and at least the first mixer (M1) of the receiver are kept relatively small. If the signal strength on the receive channel goes below a predetermined value or, on a neighboring channel, exceeds a predetermined value, said supply currents are increased. This may happen also if the bit error ratio or signal-to-noise ratio reaches a predetermined limit. The supply currents may be adjusted in one or more steps.

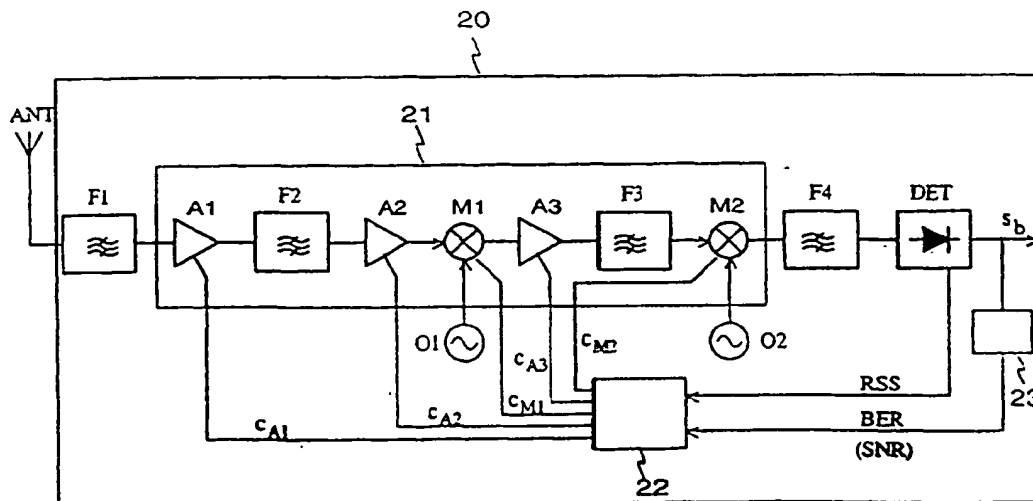


Fig. 2

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 99 66 0173

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (InCL.7)
X	EP 0 814 567 A (LUCENT TECHNOLOGIES INC) 29 December 1997 (1997-12-29)	1,4-7,9, 11,14, 15,17-24	H04B1/10 H04B17/00
Y	* the whole document *	3,8,10, 12,13	
A	---	2,16	
X	WO 94 06213 A (MOTOROLA INC) 17 March 1994 (1994-03-17)	1,2,15, 16	
A	* the whole document *	3-14, 17-24	
X	US 5 179 724 A (LINDOFF MATS E G) 12 January 1993 (1993-01-12)	1,2,15, 16	
Y	* the whole document *	8,10,12, 13	
A		3-7,9, 11,14, 17-24	
Y	US 5 222 255 A (KUO YAO H ET AL) 22 June 1993 (1993-06-22)	3	TECHNICAL FIELDS SEARCHED (InCL.7)
A	* the whole document *	1,2,4-24	H04B
Y	US 5 761 614 A (LEITCH NEIL G ET AL) 2 June 1998 (1998-06-02)	3	
A	* the whole document *	1,2,4-24	

The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 21 March 2003	Examiner Lindhardt, U
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPC FORM 1501 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 66 0173

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-03-2003

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0814567 A	29-12-1997	US 5809400 A	15-09-1998
		EP 0814567 A2	29-12-1997
WO 9406213 A	17-03-1994	WO 9406213 A1	17-03-1994
		US 5564094 A	08-10-1996
US 5179724 A	12-01-1993	DE 4290129 T0	18-02-1993
		GB 2257337 A ,B	06-01-1993
		SE 512453 C2	20-03-2000
		SE 9202639 A	05-11-1992
		WO 9213392 A1	06-08-1992
US 5222255 A	22-06-1993	DE 69208667 D1	04-04-1996
		DE 69208667 T2	01-08-1996
		WO 9303550 A1	18-02-1993
		EP 0597905 A1	25-05-1994
		JP 7500703 T	19-01-1995
US 5761614 A	02-06-1998	AU 2218097 A	10-10-1997
		WO 9735385 A1	25-09-1997

EPO FORM P4559

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.